


Removing and installing electrical rear roller blind (sun blind)

Special tools and workshop equipment required

- ♦ Torque wrench -V.A.G 1783-

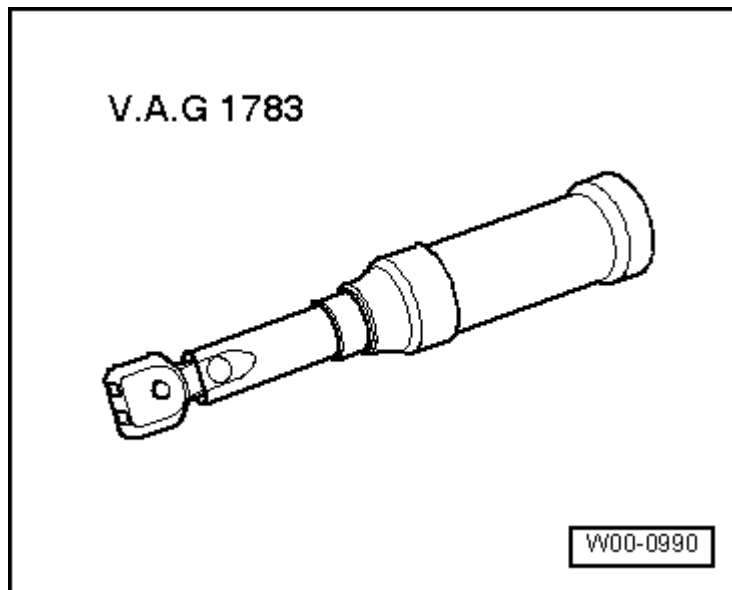


1 - Rear shelf

2 - Connector for electrical rear roller blind (sun blind)

3 - Electrical rear roller blind (sun blind)

- ♦ Removing
- Retract sun blind (rear) - 3-.
- Remove rear shelf with sun blind (rear)
→ Chapter.
- Pull out sun blind (rear) - 3- approx. 50 mm at covers with wheel -6-.
- Wedge a suitable object in between sun blind (rear) - 3- and rear shelf -1-.
- Unscrew bolts -5- (2x).
- Pull out

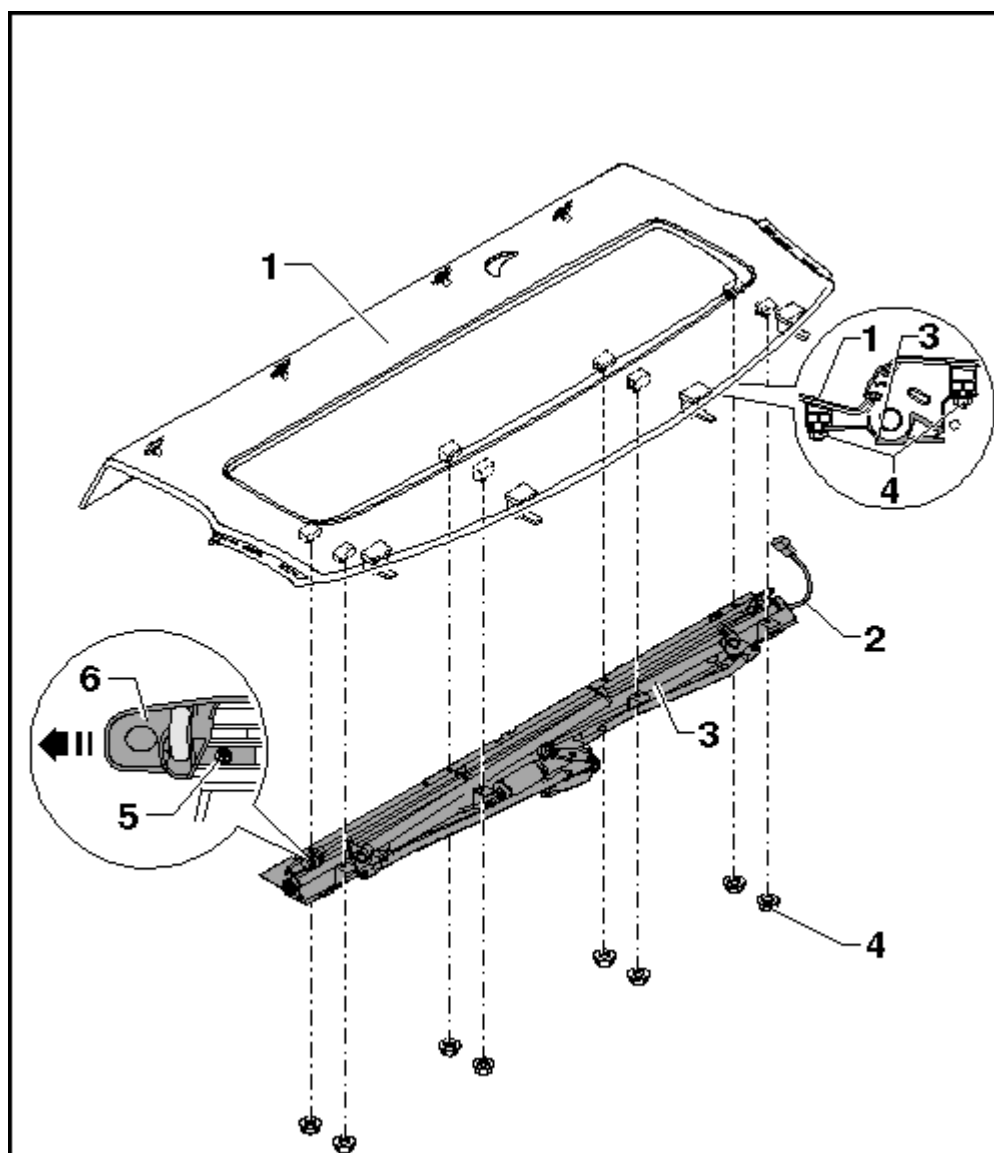

covers with
wheel -6-
(left and
right) in
direction of -
arrow-.

- Detach wiring harness from rear shelf -1-.
- Unscrew nuts -4- (8x).
- Detach sun blind (rear) -3- from rear shelf -1-.
- ♦ Installing
- Install in reverse order of removal.
- Check operation of electrical rear roller blind -3- (sun blind).

4 - Nuts (8x)

- Tightening torque: 4 Nm

5 - Bolts (2x)

- Tightening torque: 0.6 Nm

6 - Cover with wheel

- → **Item**